

09/29/99
1c571 U.S. PTO

Atty. Dkt. No. WEAT/0003

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Patent Application
Commissioner of Patents and Trademarks
Washington, D.C. 20231

Re: Inventor(s): PAUL TUBEL, MARK CRAWFORD, HENNING HANSEN and ROLU ARNE FLAATEN
Title: METHODS AND APPARATUS FOR MONITORING AND CONTROLLING OIL AND GAS PRODUCTION WELLS FROM A REMOTE LOCATION

Transmitted herewith is the patent application identified above, including:

- ☒ Specification, claims and abstract, totaling 31 pages.
☒ Drawings totaling 9 pages, ___ Formal ☒ Informal.
___ Executed Declaration and Power of Attorney.
___ Information Disclosure Statement w/ Form 1449 and References.
___ Assignment of the invention to Weatherford/Lamb, Inc.

Assignment Recordation Cover Sheet

FEE CALCULATION					
Fee Items	Claims Filed	Included With Basic Fee	Extra Claims	Fee Rate	Total
Total Claims	56	-20=	36	x \$18.00	648.00
Independent Claims	4	-3=	1	x \$78.00	78.00
Basic Filing Fee				\$760.00	\$760.00
TOTAL FEES					\$1,486.00

___ The Commissioner is hereby authorized to charge \$1,486.00 to Deposit Account No. _____.

___ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. _____. A duplicate copy of this transmittal is enclosed.

☒ Please address all future correspondence to:

B. Todd Patterson
THOMASON, MOSER & PATTERSON
3040 Post Oak Boulevard, Suite 1500
Houston, Texas 77056

I hereby certify that this correspondence is being deposited with the United States Postal Service as express mail in an envelope addressed to Commissioner of Patents and Trademarks, Washington, D.C. 20231

Express Mail Receipt No. EL422319463US

Date of Deposit September 29, 1999

Signature *Joseph M. Jong*

Respectfully submitted,

Joseph M. Jong

Joseph M. Jong
Registration No. 42,698

UNITED STATES PATENT APPLICATION FOR:

**METHODS AND APPARATUS FOR MONITORING AND CONTROLLING
OIL AND GAS PRODUCTION WELLS FROM A REMOTE LOCATION**

INVENTORS:

**PAUL TUBEL
MARK CRAWFORD
HENNING HANSEN
ROLU ARNE FLAATEN**

Certification Under 37 CFR 1.10

I hereby certify that this New Application and the documents referred to as enclosed therein are being deposited with the United States Postal Service on September 29, 1999, in an envelope marked as "Express Mail United States Postal Service", Mailing Label No. EL422319463US, addressed to: Assistant Commissioner for Patents, Box PATENT APPLICATION, Washington, D.C. 20231.

Joseph M. Joag
Name

Joseph M. Joag
Signature

September 29, 1999
Date of Signature

METHODS AND APPARATUS FOR MONITORING AND CONTROLLING OIL AND GAS PRODUCTION WELLS FROM A REMOTE LOCATION

5 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates generally to methods and apparatus for the control of production wells and injection wells. More particularly, the invention relates to methods and apparatus for monitoring and controlling oil and gas production wells or zones in a well and injection wells from a remote location or on site by a completely self contained intelligent system.

Background of the Related Art

The control of oil and gas production from wells constitutes an on-going concern of the petroleum industry due, in part, to the enormous monetary expense involved, as well as the risks associated with environmental and safety issues. Production well control has become particularly important and more complex in view of the industry wide recognition that wells having multiple branches (*i.e.*, multilateral wells) will be increasingly important and commonplace. Such multilateral wells include discrete production zones which produce fluid in either common or discrete production tubing. In either case, there is a need for controlling zone production, isolating specific zones and monitoring each zone in a particular well.

LIFT SYSTEMS

One type of production system utilizes electrical submersible pumps (ESP) for pumping fluids from downhole. Such pumps may comprise impeller driven pumps or submersible progressing cavity pumps (SPCP's). Also, pumps powered by pressurized hydraulic fluid driven impellers or the like can be used. In addition, there are other types of production systems for oil and gas wells, such as plunger or rod driven progressing cavity pumps (PCP's), plunger lift and gas lift. Plunger lift production systems include the use of a small cylindrical plunger which travels through tubing extending from a location adjacent the producing formation down in the borehole to surface equipment located at the

open end of the borehole. In general, produced fluids which collect in the borehole and inhibit the flow of fluids out of the formation and into the wellbore, are collected in the casing/tubing. Periodically, the tubing is opened and the accumulated reservoir pressure is sufficient to force the plunger up the tubing. The plunger carries with it to the surface a load of accumulated fluids which are ejected out the top of the well thereby allowing hydrocarbon or gas to flow more freely from the formation into the wellbore and be delivered to a distribution system at the surface. After the flow of gas has again become restricted due to the further accumulation of fluids downhole, a valve in the plunger or the tubing at the surface of the well is closed so that the plunger then falls back down the tubing and is ready to lift another load of fluids to the surface upon the reopening of the valve.

Rod driven pumps are in quite common usage in relatively shallow producing wells. A surface source of motive power repetitively lifts and lowers a pump plunger or turns a shaft in the PCP inside a production tubing string via a rod string which extends from the surface. Each plunger stroke or rod revolution in the PCP lifts a quantity of produced fluid to the surface distribution system. The volume of fluid produced by each stroke of the rod driven plunger or shaft revolution of the PCP is a function of the permeability of the producing formation and the formation pressure causing flow into the casing/tubing annulus through the production perforations in the casing, or in a gravel pack completion, through a screen or liner. It will be appreciated by those of skill in the art that some type of control of the opening or closing of the perforations or the screen or liner to fluid flow could, in an intelligent completion system such as that of the present invention, could be used to control undesired water entry such as that caused by "water coning." Such control can also be provided, for example, by the use of a sliding sleeve device such as that described subsequently herein to mask or unmask a screen, liner, or perforations by its motion.

A gas lift production system includes a valve system for controlling the injection of pressurized gas from a gas source, such as another gas well, a gas zone in the same well, or a compressor, into the borehole. The pressure from the injected gas, when permitted to enter the tubing via one or more gas lift valves allows accumulated formation fluids to flow up a production tubing extending along the borehole to remove the fluids and restore the free flow of gas and/or oil from the formation into the well. In wells where liquid fall

back is a problem during gas lift, plunger lift may be combined with gas lift to improve efficiency. All of the foregoing types of lift systems can be referred to as artificial lift systems. In some wells, of course, with adequate producing formation pressure, no artificial lift system is required.

5 In both plunger lift and gas lift production systems, there is a requirement for the periodic operation of a motor valve at the surface of the wellhead to control either the flow of fluids from the well or the flow of injection gas into the well to assist in the production of gas and liquids from the well. These motor valves have been conventionally controlled by timing mechanisms and are programmed in accordance with principles of reservoir
10 engineering which determine the length of time that a well should be either "shut in" and restricted from the flowing of gas or liquids to the surface and the time the well should be "opened" to freely produce. Generally, the criteria used for operation of the motor valve is strictly one of the elapse of a preselected time period. In most cases, measured well parameters, such as pressure, temperature, etc., are used only to override the timing cycle
15 in special conditions.

It will be appreciated that relatively simple, timed intermittent operation of motor valves and the like is often not adequate to control either outflow from the well or gas injection to the well so as to optimize well production. As a consequence, sophisticated computerized controllers have been positioned at the surface of production wells for
20 control of downhole devices such as the motor valves or the gas lift valves.

In addition, such computerized controllers can be used to control other downhole devices such as hydro-mechanical safety valves or sliding sleeve valves. Microprocessor-based controllers are also used for zone production control within a well and, for example, can be used to actuate sliding sleeves and inflatable or expandable packers by the
25 transmission of a surface command to downhole microprocessor controllers and/or electromechanical control devices.

SENSOR SYSTEMS

The surface controllers may also be connected to downhole sensors which transmit information to the controller such as pressure, temperature and flow rate. This data is then
30 processed at the surface by the computerized control system. Electrically submersible pumps (ESP's) or SPCP's can use pressure and temperature readings received at the surface from downhole sensors to change the speed of the pump in the borehole. As an

alternative to downhole sensors, wire line production logging tools are also used to provide downhole data on pressure, temperature, flow, gamma ray and pulse neutron, or other formation characteristics using a wire line surface unit.

PRIOR CONTROL SYSTEMS

5 There are numerous patents related to the control of oil and gas production wells. In general, these patents relate to surface control systems using a surface microprocessor or downhole control systems that are initiated by surface generated control signals. The surface control system patents generally disclose computerized systems for monitoring and controlling a gas/oil production well whereby the control electronics is located at the surface and communicates with sensors and electromechanical devices near the surface. 10 An example of a surface control system is described in U.S. Pat. No. 4,633,954, *Dixon et al.*, which is hereby incorporated by reference in its entirety. The downhole control system patents generally disclose downhole microprocessor controllers, electromechanical control devices and sensors. An example of a downhole control systems is described in 15 U.S. Pat. No. 5,273,112, *Schultz*, which is hereby incorporated by reference in its entirety.

20 In another method of controlling the production well, the surface system is connected to a variable frequency drive system that varies the speed of the artificial lift system based on the pressure and flow information downhole and transferred to the surface controller. A more advanced control system links the surface control via radio communication or cellular phone to a remote controller, and the data received from the downhole monitoring system is transferred from the surface controller to the processor at the remote location on a regular basis. Changes to the well operating parameters may then be sent from the remote controller to the surface controller via radio communication or cellular phone on a regular basis. However, such systems do not provide flexibility in the 25 location of access of the human operators because the physical locations of the surface controllers and the remote controller dictate the location from which the production parameters can be controlled and changed. Furthermore, such prior art systems do not provide flexibility in the choice of their mode of operation as to controlling one zone, one well, or an entire hydrocarbon production from a field.

30 While it is well recognized that hydrocarbon production wells will have increased production efficiencies and lower operating costs if surface computer based controllers and downhole microprocessor controllers (actuated by external or surface signals) of the type

discussed hereinabove are used, the presently implemented control systems nevertheless suffer from other drawbacks and disadvantages.

One significant drawback of present production well control systems involves the extremely high cost associated with implementing changes in well control and related workover operations. Presently, if a problem is detected at the well, the customer is required to send a drawworks or rig to the wellsite at an extremely high cost (e.g., five million dollars for 30 days of offshore work). The well must then also be shut in during the workover causing a large loss in revenues (e.g., 1.5 million dollars for a 30 day period). Associated with these high costs are the relatively high risks of adverse environmental impact due to spills and other accidents as well as potential liability of personnel at the rig site. Of course, these risks can lead to even further costs. Because of the high costs and risks involved, in general, a well operator may delay important and necessary workover of a single well until other wells in that area encounter problems. This delay may cause the production of the well to decrease or be shut in until the rig is brought in. The system of the present invention offers retrievable pumps, controllers, and/or sensor modules without the need for a full derrick, drawworks and a casing or tubing pulling operation.

Therefore, there is a need for a system for monitoring and controlling production wells that provides substantially "real time" data to an operator and which allows an operator to control the production operation from a remote location and which offers greater flexibility and retrievable system components.

SUMMARY OF THE INVENTION

The invention provides apparatus and methods for monitoring and controlling hydrocarbon production wells and/or injection wells from a remote location. The apparatus for monitoring and controlling one or more hydrocarbon production wells or injection wells from a remote location comprises one or more surface control and data acquisition systems; one or more sensors disposed in communication with the one or more control and data acquisition systems; one or more downhole flow control devices disposed in communication with the one or more control and data acquisition systems; and one or more remote controllers disposed in communication with the one or more control and data acquisition systems. Preferably, the remote controller comprises a computer having an internet access disposed in communication with the one or more control and data

acquisition systems through a communication device comprising an internet web site server.

The method for monitoring and controlling a downhole hydrocarbon production well or an injection well comprises: transmitting data collected by a downhole sensor module to a surface control and data acquisition system; evaluating downhole operating conditions and optimizing downhole operating parameters utilizing an optimization software program disposed in communication with the surface control and data acquisition system; and transmitting signals between the surface control and data acquisition system and a remote controller utilizing a satellite communication system, the remote controller comprising a computer and an internet browser control access adapted to display operating conditions and parameters and to accept instructions to change operating parameters.

Another aspect of the invention provides a completely closed loop operating system utilizing a reservoir modeling program for a complete oilfield can be incorporated into the remote controller computer, or at the surface monitoring and control computer. Complete flexibility in zone, reservoir or entire field operation may be achieved by supplying zone, well, or entire field downhole pressure, temperature, flow rate, seismic input, electric, sonic or nuclear logging data, and any other downhole production parameters which sensors can measure to a system operated mathematical model of the zone, well, or field which is capable of optimizing the timing of flow or shut in of zone, well, or multiple wells in a field, to achieve maximum cost effectiveness and production output from the zone, well or field which it is designed to monitor and control.

Moreover, the methods and apparatus of the present invention incorporate the flexibility of operation which allows replacement of worn or inoperative downhole components without the necessity of bringing a full blown drawworks or rig onto a given well site. The novel systems and methods of the present invention offer multiple methods and apparatus for retrieving and/or replacing downhole components such as valves, sensors, artificial lift components, and sealing members such as packers by the use of mere portable masts for wireline or coil tubing reels, rather than complete removal of production tubing from a given well. These methods and apparatus, additionally, are selective in nature, not sequential, *i.e.*, a component mid way down a well, near the surface, or at the bottom may be equally accessed without removal of production tubing from the well.

BRIEF DESCRIPTION OF THE DRAWINGS

So that the manner in which the above recited features and advantages of the present invention are attained can be understood in more detail, a more particular description of the invention, briefly summarized above, may be had by reference to the aspects of the invention and the embodiments thereof which are illustrated in the appended drawings.

It is to be noted, however, that the appended drawings illustrate only typical embodiments according to the broader concepts of this invention and are therefore not to be considered limiting of its scope, for the invention may admit to other equally effective embodiments.

Figure 1 is a schematic view of the remote control system of the present invention for use in controlling a plurality of offshore well platforms having a plurality of wells and zones;

Figure 2 is a block diagram illustrating the remote monitoring and control system of the present invention.

Figure 3 is a block diagram illustrating a surface control and data acquisition system.

Figure 4 is a schematic illustration of a zonal isolation control system.

Figure 5 is a schematic illustration of the zonal isolation control tool, having a linearly moveable sleeve type zone control valve and showing its wet-connector, polished surface to permit sealing of the tool internally of the side pocket of the mandrel, seals for sealing within the mandrel and a latch mechanism for latching the tool within the side pocket of the mandrel.

Figure 6 is a schematic illustration in section, showing moveable plunger, moveable by linear or rotary actuation, and having hydraulic "open" and "close" passages through which hydraulic fluid is conducted for valve actuation.

Figure 7 is a schematic illustration in section showing a plunger actuated piston and housing assembly and having one or more actuators for "opening" and "closing" movement of the plunger and piston.

Figure 8 is a schematic illustration, partially in section, showing a retrievable pump/seal tool disposed in a well bore.

Figure 9 illustrates a downhole smart screen system 900 for selectively controlling

fluid flow through the production tubing.

DETAILED DESCRIPTION OF THE INVENTION

The present invention generally provides a system for controlling hydrocarbon
5 production wells or injection wells from a remote location. More particularly, the present
invention provides apparatus and methods for controlling from a remote location the
process of artificial lifting hydrocarbons to the surface utilizing one or more wells at a
single platform and/or multiple wells located at multiple platforms or locations. The
control and monitor system of the present invention is adaptable for controlling individual
10 zones in multiple wells on multiple platforms, all from a remote location.

The control and/or monitoring system of this invention generally comprises a
downhole control/monitor module, a surface control and data acquisition system disposed
in communication by satellite, for example, with the downhole control/monitor module,
and a remote control system disposed in communication by satellite, for example, with the
15 surface control and data acquisition system.

Figure 1 is a schematic view of the remote control system of the present invention
for use in controlling a plurality of offshore well platforms having a plurality of wells and
zones. The remote control system communicates with a plurality of well platforms via
earth satellite 13 transmission. Each well platform is typically associated with a plurality
20 of wells that extend from each platform through water to the surface of the ocean floor and
then downwardly into formations under the ocean floor. Although the invention is
illustrated in relation to offshore platforms, the inventors contemplate that the invention
could also be used to control land based wells and oilfields as well.

Each platform 12 is associated with a plurality of wells 14, and a given well 14 is
25 divided into a plurality of separate production zones 16 which are required to isolate
specific areas of a well for purposes of producing selected fluids, preventing blowouts and
avoiding water intake. Such zones may be positioned in a single vertical well or such
zones can result when multiple wells are completed in a common production zone. The
oilfield depicted includes contemporary features of well production such as the drilling
30 and completion of lateral or branch wells that extend from a particular primary wellbore.
These lateral or branch wells can be completed such that each lateral well constitutes a
separable production zone and can be isolated for selected production. As shown in Figure

1, each well can include a plurality of zones that need to be monitored and controlled for efficient production and management of the well fluids, and each production zone includes a completion for production of hydrocarbons.

Figure 2 is a block diagram illustrating the remote monitoring and control system of the present invention. The remote monitoring and control system 200 comprises a downhole sensor/control module 210 disposed downhole, a surface control and data acquisition system 220 disposed in communication with the downhole sensor/control module 210, and a remote control system 230 disposed in communication with the surface control and data acquisition system 220 via a satellite transceiver component and an antenna. Optionally radio links, fiber optic cable or other high data rate communication links could be used if desired.

The downhole sensor/control module 210 preferably comprises a plurality of downhole sensors, downhole control electronics, seismic sensors and downhole electromechanical modules that can be placed in different zones in a well. Preferably, each zone of each well includes a downhole control/monitor module dedicated to monitor and control production and operating parameters for that particular zone.

The downhole sensor/control module 210 is preferably hardwired to communicate with the surface control and data acquisition system via electrical cable carried by the production tubing. Other suitable communications techniques include wireless transmissions such as low frequency radio transmission from the surface location or from a subsurface location, with corresponding radio transmission feedback from the downhole components to the surface location or subsurface location; the use of acoustic transmission and reception; the use of electromagnetic wave transmission and reception; the use of microwave transmission and reception; the use of fiber optic communications through a fiber optic cable carried by the production tubing from the surface to the downhole components; and the use of electrical signaling from a wire line carried transmitter to the downhole components with subsequent feedback from the downhole components to the wire line carried transmitter/receiver, and the use of fluid lines to provide signals. Communication may also consist of various modulation types such as frequencies, amplitudes, codes or variations or combinations of these parameters or a transformer or inductive coupled technique which involves wire line conveyance of a transformer primary or secondary coil to a downhole tool. Either the primary or secondary of the transformer is

conveyed on a wire line with the other half of the transformer residing within the downhole tool. When the two portions of the transformer are mated, data and electrical power can be interchanged.

The surface control and data acquisition system preferably interfaces with all of the zones/wells of a well platform or location and the downhole component devices to poll each sensor device for data related to the status of the downhole sensors attached to the module. In general, the surface control and data acquisition system allows the operator to control the position, seal status, and/or fluid flow in each zone of the well by sending a command to the device being controlled in the wellbore. An important function of the surface control system is to monitor, control and optimize the fluid or gas flow from the formation into the wellbore and from the wellbore into the surface.

In order to optimize the production of hydrocarbonaceous fluids from each zone, well, or the entire oilfield both the surface control and data acquisition system and/or the remote control system 230 are provided with computer components which have access via one or more server computers to the world wide web, or internet, via their respective satellite transceivers and communications systems, or the like. This internet access allows the input of formation geological data, data gathered during the drilling operation prior to completion of a well, area seismic data such as 3D seismic, economic data such as hydrocarbon product prices, mapping and topological data for the geographical area of the field, climate data, operating parameter data on downhole system components, etc., to an optimization software package which can be provided to both surface control and data acquisition system 220 and remote control system 230. The optimization software packages can comprise zone, well, or entire field flow prediction and control software packages such as the Vertex 1000 software available from Vertex Petroleum Systems of Englewood, Colorado, or the CS Lift product family system available from Case Services Inc., of Houston, Texas. These types of optimization software packages can include mathematical models of a single zone, multiple zones, a complete well, or even an entire oilfield. Changes in downhole flow parameters in a zone, well, or for an entire field can be modeled as a function of time and their effects on ultimate hydrocarbon production amount and rate for the zone, well or field can be used to provide command signals from/to the surface control and data acquisition system 220 and/or remote control system 230 to the downhole components in the zone, well, or oilfield to optimize hydrocarbon

production to any desired set of parameters.

The surface control and data acquisition system also includes an optimization software programmed to automatically monitor and control the activities in the wellbore by monitoring data collected by the well sensors connected to the data acquisition electronics and responding to changes in the well/zone field conditions by changing the downhole mechanics according to the programmed response optimized for a particular set of operating conditions. The surface control and data acquisition system includes a computer that provides commands to downhole tools such as a packer, sliding sleeve or valve to open, close, change state or do whatever other action is required if certain sensed parameters are outside the normal or pre-selected well zone operating range. An operator can override the operating parameters by entering an external or surface command from the surface control and data acquisition system or from the remote controller.

The surface control and data acquisition system includes a computer system used for processing, storing and displaying the information acquired downhole and interfacing with the operator. The computer system preferably comprises a personal computer or a work station with a processor board, short term and long term storage media, video and sound capabilities as is well known. The computer control is powered by a power source for providing energy necessary to operate the surface control and data acquisition system as well as any component of the downhole control/monitor module. Power is regulated and converted to the appropriate values required.

The surface control and data acquisition system preferably also includes a printer/plotter which is used to create a paper record of the events occurring in the well. The hard copy generated by computer can be used to compare the status of different wells, compare previous events to events occurring in existing wells and to get formation evaluation logs. The data acquisition system preferably comprises analog and digital inputs and outputs, computer bus interfaces, high voltage interfaces and signal processing electronics as well known in the art.

The surface control and data acquisition system interfaces with the downhole sensor modules to acquire data from the wellbore and controls the status of the downhole devices and the fluid flow from the well or from the formation. A depth measurement system preferably interfaces with the surface control and data acquisition system and provides information related to the location of the tools in the borehole as the production

tubing carried tool string is lowered into the borehole. The surface control and data acquisition system also includes one or more surface sensors 46 which are installed at the surface for monitoring well parameters such as pressure, rig pumps and heave, all of which can be connected to the surface system to provide the operator with additional information on the status of the well.

The surface control and data acquisition system preferably controls the activities of the downhole control modules by requesting sensor measurement data on a periodic basis and commanding the downhole modules to open, or close electromechanical devices such as seals or valves and to change monitoring parameters due to changes in long term borehole conditions. When an operation parameter needs to be changed, the surface control and data acquisition system sends a control signal to a downhole electromechanical control device which then actuates a downhole component such as a sliding sleeve, packer seal or other type flow or pressure control valve. The present invention can automatically control downhole component in response to sensed selected downhole parameters. Alternatively, the downhole control modules also receives downhole sensor information directly and are programmed to control the downhole devices directly in response to the received information. For this alternative, the surface control and data acquisition system can provide an override command in this case to change the downhole control module's programmed responses.

The surface control and data acquisition system also acquires and processes data sent from surface sensors and downhole sensors as received from the data acquisition system. The data acquisition system preferably pre-processes the analog and digital sensor data by sampling the data periodically and formatting it for transfer to the electronic computer or processor of the surface control and data acquisition system. Included among this data is data from flow sensors, formation evaluation sensors, seismic sensors and electromechanical position sensors that provide information on position, orientation and the like of the downhole components. The formation evaluation data is processed for the determination of reservoir parameters related to the well production zone being monitored by the downhole control module. The flow sensor data is processed and evaluated against parameters stored in the downhole module's memory to determine if a condition exists which requires the intervention of the processor electronics to automatically control the electromechanical devices. The seismic or acoustic data gathered from downhole passive

detectors is also processed in the surface control and data acquisition system to determine, for example, sand or debris impingement into the casing/tubing annulus. The automatic control executed by this processor can be initiated without the need for an initiation or control signal from the surface or from some other external source. Thus the surface control and data acquisition system can, if desired, provide a closed loop system for well, zone or field optimization.

The downhole sensors associated with flow sensors and formation evaluations sensors may include, but are not limited to, sensors for sensing pressure, flow, temperature, oil/water content, geological formation parameters such as porosity or density, gamma ray detectors and formation evaluation sensors which utilize acoustic, nuclear, resistivity and electromagnetic technology. It will be appreciated that typically, the pressure, flow, temperature and fluid/gas content sensors will be used for monitoring the production of hydrocarbons while the formation evaluation sensors will measure, among other things, the movement of hydrocarbons and water in the formation. The surface control and data acquisition system preferably automatically execute commands for actuating electromechanical drivers or other electronic control apparatus. In turn, the electromechanical driver will actuate an electromechanical device for controlling a downhole tool such as a sliding sleeve, shut off device, valve, variable choke, smart shunt screen, smart screen chokes, penetrator valve, perforator valve or gas lift tools. The surface control and data acquisition system may also control other electronic control apparatus such as apparatus that may effect flow characteristics of the fluids in the well. In addition, the surface control and data acquisition system is capable of recording downhole data acquired by flow sensors, formation evaluation sensors and electromechanical position sensors.

The downhole sensor system includes a power source for operation of the system. Power source can be generated in the borehole, at the surface or it can be supplied by energy storage devices such as batteries. Power is used to provide electrical voltage and current to the electronics and electromechanical devices connected to a particular sensor in the borehole. Power for the power source may come from the surface through hardwiring or may be provided in the borehole such as by using a turbine generator. Other power sources include chemical reactions, flow control, thermal, conventional batteries, borehole electrical potential differential, solids production or hydraulic power methods.

The surface control and data acquisition system controls the electromechanical systems, monitors formation and flow parameters, processes data acquired in the borehole, and transmits and receives commands and data to and from the remote controller 230. Figure 3 is a block diagram illustrating the surface control and data acquisition system in more detail. The surface control and data acquisition system comprises one or more microprocessors 301, an analog to digital converter 302, analog conditioning hardware 303, digital signal processor 304, communications interface 305, serial bus interface 306, non-volatile solid state memory 307 and electromechanical drivers 308.

The microprocessor 301 provides the control and processing capabilities of the surface control and data acquisition system. The processor controls the data acquisition, the data processing, and the evaluation of the data for determination if it is within the proper operating ranges. The controller also prepares the data for transmission to the remote controller, and drive the transmitter to send the information to the remote controller 230 of Figure 2. The processor 301 also has the responsibility of controlling the electromechanical devices 309. The analog to digital converter 302 transforms the data from the conditioner circuitry 303 into a binary number. That binary number relates to an electrical current or voltage value used to designate a physical parameter acquired from the geological formation sensors 310, the fluid flow sensors 311, or status of the electromechanical devices position sensors 312. The analog conditioning hardware 303 processes the signals from the sensors into voltage values that are at the range required by the analog to digital converter 302. The digital signal processor 304 provides the capability of exchanging data with the processor 301 to support the evaluation of the acquired downhole information, as well as to encode/decode data for transmitter. The processor 301 also provides the control and timing for the electromechanical drivers 308.

The communication drivers 305 are electronic switches used to drive the electrical signals over a transmission medium. The processor 301 provides the control and timing for the drivers 305. The serial bus interface 306 allows the processor to interact with other surface data acquisition and control systems and/or the internet server computer. The electromechanical drivers control the flow of electrical power to the electromechanical devices used for operation of the sliding sleeves, packers, safety valves, plugs, smart screens and any other fluid control device downhole. The drivers 309 are operated by the microprocessor 301. The non-volatile memory 307 stores the code commands used by the

controller 301 to perform its functions downhole. The memory 307 also stores the variables used by the processor 301 to determine if the acquired parameters are in the proper operating range. It will be appreciated that downhole valves are used for opening and closing of devices used in the control of fluid flow in the wellbore. Such
5 electromechanical downhole devices 309 can be actuated by the surface control and data acquisition system either in the event that a borehole sensor value is determined to be outside a safe to operate range set by the operator or if a command is sent from the surface.

The remote controller of Figure 2 preferably comprises a satellite transceiver, a computer server, a personal computer and an internet browser access. The remote
10 controller is linked by the satellite transceiver to a satellite system that transmits signals between the surface control and data acquisition system and the remote controller. The signals transmitted between the surface control and data acquisition system and the remote controller includes information or data collected by the data acquisition system, control signals for changing the operating parameters of particular wells/zones, and instructions
15 for changing the operating optimization program. The server computer preferably comprises an internet web site server and provides a central processor and data storage for all of the data and other signals transmitted between the remote controller and the surface control and data acquisition system and the world wide web or internet. The server computer is linked to an internet system or other access systems that allows an user to
20 access the server computer from any computer linked to the access system. The server is preferably also linked to the world wide web or internet system to provide user access from any computer that has an internet access. Access is limited to authorized users having correct passwords or other types of controlled access codes or methods. Thus, a user is not limited by the location of the remote controller because internet access is
25 prevalently available throughout the world. Furthermore, portable computers can access the internet through wireless communications, such as analog or digital mobile phones or communication systems, and allow user access from any location accessible by the mobile phones.

Information sent from the remote controller 230 of Figure 2 may consist of actual
30 control information, or may consist of data which is used to reprogram the memory in the processor 321 of the surface control and data acquisition system for initiating of automatic control based on sensor information. In addition to reprogramming information, the

information sent from the remote controller may also be used to recalibrate a particular sensor downhole through the surface control and data acquisition system. A plurality of downhole flow sensors and downhole formation evaluation sensors communicate with the surface control and data acquisition system. The sensors are permanently located
5 downhole and are positioned in the completion string and/or in the borehole casing. The formation evaluation sensors, including density, porosity and resistivity types, are well known in the art and are commercially available. These sensors measure formation geology, formation saturation, formation porosity, gas influx, water content, petroleum content and formation chemical elements such as potassium, uranium and thorium. The
10 formation evaluation sensors preferably provide formation evaluation data constantly such that the data is available in real or near real time, and there will be no need to periodically shut in the well and perform costly wireline evaluations.

The production well control system of this invention may utilize a wide variety of conventional as well as novel downhole tools, sensors, valving and the like. For example,
15 the subsurface zones of each well are preferably isolated from one another, and each of the wellbores or well sections in communication with the respective subsurface zones is preferably provided with a valve control isolation system. The valve control isolation system is preferably controlled by the surface control system. Each zonal isolation control assembly is connected to a source of electric power such as production tubing carried cable
20 and the surface control system, such as a control computer. The zonal isolation control assembly may be located within the primary wellbore section or located within branch bore sections as desired. Hydraulic fluid tubes for controlling electromechanical devices may also be disposed in parallel to the electrical lines or cables.

Figure 4 is a schematic illustration of one embodiment of a typical zonal isolation
25 control system. Each of the zonal isolation control systems includes a valve module 44 which is designed for hydraulic opening and closing actuation. The valve module 44 is preferably in the form of a rotary ball or a sliding sleeve valve mechanism. Other suitable types of valves, such as electrically energized or hydraulically actuated valves or gate valves, may be employed as isolation valves without departing from the spirit and scope of
30 this invention. The ball valve member 44 is coupled by a pup joint 46 to a controller instrument located in a permanently installed mandrel 48. The mandrel 48 is a component of the production tubing string of the well and has an internal flow passage 50 through

which fluid is permitted to flow from the selected subsurface zone. Within the mandrel 48 is a side pocket 52 having an internal polished surface section for sealing engagement by seals 54 and 56 of an elongate tool 58 in the form of a differential pressure sensor electronic module or package having pressure sensors and perhaps other sensors, such as temperature sensors as desired, for sensing various properties of the production fluid entering the branch bores or primary wellbore from selected subsurface zones. The tool also includes a linear motion device to develop hydraulic fluid pressure which provides pressure induced opening or closing force for the valve element 42 of the valve sub. The tool 58 is also provided with an electrical connector 60 which is received by a wet-connect type electrical connector 62 in mandrel 48 to establish electrical connection with the position sensing system of the ball valve mechanisms 44. The tool 58 also establishes fluid connection with hydraulic opening and closing lines or passages 64 that are operatively coupled with ball valve sub 42 for hydraulically energized operation (opening or dosing) of the valve element 44.

Referring now to Figure 5, the zonal isolation control tool shown generally at 58 is of an elongate configuration and is adapted to be received within the side pocket 52 of the mandrel as shown in Figure 4. The tool 58 incorporates external packings 68, 70, 72 and 74 which engage respective internal polished sealing surfaces of the side pocket, with the wet-connect type electrical connector 60 projecting above the upper packing 68 and adapted for electrical connection with the circuit connector 62 shown in Figure 4. An electronic package within section 76 of the tool between the packings 68 and 70. Well fluid pressure that is present within the casing/tubing annulus between the packings is communicated within the tool for pressure sensing by the electronic package via a casing pressure sensing port 78. From the standpoint of opening and closing movement of the isolation valve, whether it is in the form of a ball valve, sleeve valve, gate valve, or the like, the tool section 80 between the packings 70 and 72 defines a "valve open" port 82 that is communicated by a hydraulic control line 84 with the isolation valve in a manner wherein hydraulic pressure in the line or passage 84 will cause opening movement of the isolation valve. Closing movement of the isolation valve is accomplished by a "valve close" hydraulic fluid line or passage 86 which is communicated via a valve close port 88 that is located within tool section 90 between the packing elements 72 and 74. For securing the tool 58 within the side pocket 52 of the mandrel 48 in the manner shown in

Fig. 2, the lower portion of the tool is defined by a latch mechanism 92 that is adapted for latching engagement with an internal latch profile that is defined within the lower portion of the side pocket of the mandrel.

Referring now to Figure 6, for the purpose of imparting opening or closing movement to the isolation valve mechanism, a hydraulic actuator is shown generally at 94 and comprises a hydraulic cylinder 96 having a piston 98 moveably deposited therein. The piston is linearly moveable within the cylinder by an elongate plunger element 100. The plunger is moveable by a plunger actuator 102 that is electrically operated. The plunger actuator may be of the linear type, such as may be defined by a solenoid mechanism or it may conveniently take the form of a rotary type, such as being in the form of a rotary electric motor driving a threaded element having threaded engagement with the plunger 100. In this case, rotation of the threaded drive element will impart linear movement to the plunger member and will develop significant hydraulic pressure of achieving opening and closing movement of the zonal isolation valve. Other types of electrically energized actuators may be also utilized for moving the plunger linearly to thus move the piston 98 linearly within the cylinder 96. When the plunger is moved upwardly, hydraulic pressure is increased in the hydraulic line 84 causing forcible opening of the isolation valve. In the alternative, when the plunger moves the piston downwardly hydraulic pressure is increased in the flow line or passage 86 thereby forcibly closing the isolation valve. As shown in Figure 7, an alternative embodiment of the zonal isolation control system may incorporate a linearly moveable plunger 104 that moves a piston member 106 linearly within the piston chamber 108 of a plunger housing or cylinder 110. Opposite ends 112 and 114 of the plunger may extend through passages defined in respective end walls 116 and 118 of the cylinder, thus permitting the plunger to be actuated by an electrically energized power mechanism located externally of the cylinder. If desired, power actuator 120 may impart opening and closing movement to the plunger. In the alternative, one power actuator may impart opening movement to the plunger while another plunger actuator 122 may impart closing movement to the plunger.

The side pocket mandrel/kickover system, as shown in Figures 4, 5 and 6, illustrates one way of retrieving downhole components without the use of a complete draw works or rig to pull production tubing. The electrical submersible pump and seal packer tool illustrated in Figure 8 shows another way to accomplish this feat in the system of the

present invention. In Figure 8, a seal/pump tool 700 is run into the system via wireline interior to production tubing 702 which is placed inside casing 701. The seal/pump tool 700 comprises an elongate body which houses an inductive ring coupler 703, a seal stack or packer 704 and an ESP (Electrical Submersible Pump) 705. Pump intake ports 706 are located below coupler 703 and above a sensor package 707. Pump discharge ports 708 are located inside tubing 702 which carries a three-phase electrical cable 709 supplying power and communications to pump 705 and sensor 707 which provide data to the surface control and data acquisition system as previously described. The upper end of tool 700 is provided with a fishing neck 710 for wireline retrieval or with a coil tubing detachable connector (not shown) if desired. Tool 700 may be lowered inside production tubing 702 on wireline or by coil tubing in the case of placement in a horizontal borehole. The tool 700 may also be deployed by electrical wire line (or e-line) and hydraulic pumping. The end of production tubing 702 is provided with a locking nipple having an inductive coupling 711. An anti-rotation lock pin 712 prevents rotation of tool 700 when landed onto locking nipple/inductive coupler 711. The locking nipple 711 also prevents vertical movement of tool 700 due to pressure differences above/below seal packer 704. Operation of the tool 700 can be controlled through control lines connected to the tool 700 through wet connectors or inductive couplers. The control lines can include fiber optic lines, electric lines, fluid lines, and wireless components, such as electromagnetic devices, earth conduction devices, and acoustic devices. Once landed, tool 700 is activated by command signals from surface control and data acquisition system 220 of Figure 2, and the packer 704 isolates the input and output fluid ports 706,708. Operation of the tool 700 is given with more detail in Norwegian Patent Application 19992948, filed on June 16, 1999. If it is desired to retrieve tool 700, a wireline fishing tool, or the like, is lowered and engages the fishing neck 710. Coil tubing retrieval may be performed similarly. In either instance it is not necessary to provide a draw works or rig to pull production tubing 702.

The production well control system of this invention may utilize a wide variety of downhole tools, sensors, and valves, including: a retrievable sensor gauge, side pocket mandrel; subsurface safety valve position and pressure monitoring system; remotely controlled inflation/deflation device with pressure monitoring; remotely actuated downhole tool stop system; remotely controlled fluid/gas control system; and remotely controlled variable choke and shut-off valve system. Examples of these downhole tools

are described in U.S. Patent No. 5,732,776, *Tubel et al.*, hereby incorporated by reference in its entirety. These tools are electrically connected to the downhole control module or to the surface control system and linked in satellite communication with the remote control system as described above.

5 Additionally, the downhole tools may include one or more downhole smart screen systems disposed on a production tubing. Figure 9 illustrates a downhole smart screen system 900 for selectively controlling fluid flow through the production tubing. The smart screen system 900 includes a rotatable tubing portion 902 having a plurality of inlet ports 904 and a fixed tubing portion 906 having a corresponding number of inlet ports 908.

10 Although the rotatable tubing portion 902 is shown as the outer tubing, it is understood that the rotatable tubing portion can be positioned alternately as the inner tubing. The inlet ports 904, 908 may be disposed circumferentially around the tubing or only a portion of the circumference. The inlet ports 904, 908 preferably comprise a plurality of circular holes spaced apart such that the portion of tubing between adjacent holes is wider than the

15 diameter of the holes. Alternatively, the inlet ports comprise openings such as longitudinal slits, ovals, and other shapes. The rotatable tubing portion 902 is controlled by a control line (not shown) and rotatable between a closed position (as shown by 900A) and an open position (as shown by 900B). A variety of driver devices can be used to control the movement of the rotatable tubing portion 902, including hydraulic and electric

20 devices. In a closed position, the rotatable tubing portion 902 is rotated such that the each inlet port 904 is blocked by the portion between adjacent inlet ports 908. In an open position, the inlet ports 904 and 908 are aligned in matching positions to allow fluid intake into the tubing. The smart screen system 900 preferably includes a plurality of fluid

sensors 910 disposed on the production tubing for sensing the fluid around the production

25 tubing. For a hydrocarbon production, when the fluid sensor 910 detects hydrocarbon fluids (e.g., oil) around the production tubing, the fluid sensor 910 sends a signal to a controller connected to the smart screen system to rotate the rotatable tubing portion to an open position to allow flow into the production tubing. When the fluid sensor 910 detects water or other undesired formations around the tubing, the fluid sensor 910 sends a signal

30 to a controller connected to the smart screen system to rotate the rotatable tubing portion to a closed position. The smart screen system promotes efficient hydrocarbon production and reduces undesirable contents into the production system.

The present invention also provides control modules placed inside the wellbore (*i.e.*, well bore devices) to control the flow of fluids in the wellbore to optimize the pump efficiency. The wellbore devices, such as electrical submersible pumps, are preferably remotely controlled from the surface using a hydraulic or electric lines deployed from the surface into the wellbore along the casing or production tubing. Operation of the well bore devices can also be controlled by other control lines such as fiber optic lines or wireless components. The downhole devices can also be connected to the control and data acquisition system utilizing one or more communication members selected from electrical cables, fiber optic cables, hydraulic devices, electromagnetic devices, earth conduction devices, and acoustic devices. The control lines are preferably connected to the well bore devices through wet connects or inductive couplers. The flow of fluids from these devices in the wellbore can be controlled from a remote location by sending a command to the downhole system, for example via satellite communications to increase or decrease the flow through the tool. The communications in the wellbore can be done using electrical cables and digital or analog communications techniques. The remote control system according to the invention can also provide control of the amount of chemicals delivered inside the wellbore using the same technique to eliminate paraffin, and scale buildup in the wellbore, such as calcium carbonate. Another aspect of the invention monitors and controls steam injection into the wellbore, formation influx and water influx using the remote controller. Other applications of the remote controller and/or the closed loop control system described above according to the invention are contemplated by the inventors.

While the foregoing is directed to the preferred embodiment of the present invention, other and further embodiments of the invention may be devised without departing from the basic scope thereof. The scope of the invention is determined by the claims which follow.

CLAIMS:

1 1. An apparatus for downhole production or injection wells, comprising:
 2 a) one or more downhole production or injection wells; and
 3 b) a control system comprising:
 4 i) one or more surface control and data acquisition systems;
 5 ii) one or more sensors disposed in communication with the surface
 6 control and data acquisition systems;
 7 iii) one or more downhole devices disposed in communication with the
 8 surface control and data acquisition systems; and
 9 iv) one or more remote controllers disposed in communication with the
 10 surface control and data acquisition systems.

1 2. The apparatus of claim 1 wherein the downhole devices comprise one or more
 2 devices selected from the group of smart shunt screens, sliding sleeves, chemical injection
 3 devices, circulating valves, gas lift valves, water injection valves, smart screens chokes,
 4 diverters, flappers, safety valves, and packers.

1 3. The apparatus of claim 1 wherein the downhole devices are disposed in
 2 communication with one or more components of the one or more downhole production or
 3 injection wells.

1 4. The apparatus of claim 1 wherein the downhole devices are disposed in
 2 communication with one or more sensors of the control system.

1 5. The apparatus of claim 1 wherein the one or more sensors comprise one or more
 2 permanent downhole sensors.

1 6. The apparatus of claim 1 wherein the one or more sensors comprise one or more
 2 retrievable sensors.

1 7. The apparatus of claim 1 wherein the control system comprises an electric control

2 system.

1 8. The apparatus of claim 1 wherein the downhole production well comprises an
2 artificial lift system disposed in cooperation with the downhole well.

1 9. The apparatus of claim 8 wherein the artificial lift system includes a programmable
2 automation control system.

1 10. The apparatus of claim 8 wherein the artificial lift system includes one or more
2 surface sensors disposed to monitor operation of the artificial lift system.

1 11. The apparatus of claim 8 wherein the artificial lift system includes one or more
2 sub-surface sensors disposed to monitor operation of the artificial lift system.

1 12. The apparatus of claim 8 wherein the control system comprises an electric control
2 system.

1 13. The apparatus of claim 1, further comprising:
2 c) a retrievable pump system disposed in cooperation with the downhole
3 production or injection well.

1 14. The apparatus of claim 13 wherein the retrievable pump system comprises sensors.

1 15. The apparatus of claim 13 wherein the retrievable pump system is deployed by a
2 component selected from the group consisting of coil tubing, electric line, hydraulic
3 pumping, and wire line.

1 16. The apparatus of claim 15 wherein the retrievable pump system is connected to one
2 or more communication control member selected from the group of fiber optic lines, fluid
3 pumping lines, electric lines and wireless components.

1 17. The apparatus of claim 13 wherein the retrievable pump system comprises one or

2 more pumps selected from the group consisting of an electric submersible pump, a linear
3 motor drive pump, an impeller driven pump, a progressive cavity pump, a gas lift, a rod
4 pump and a jet pump.

1 18. The apparatus of claim 17 wherein the electric submersible pump is disposed in
2 electrical connection with one or more wet connects disposed inside a production tubing of
3 the downhole production well.

1 19. The apparatus of claim 17 wherein the electric submersible pump is disposed in
2 electrical connection with an inductive coupler connected to the control system.

1 20. The apparatus of claim 1 wherein the control system further comprises:
2 v) a communication device disposed between the one or more remote
3 controllers and the one or more surface control and data acquisition systems.

1 21. The apparatus of claim 20 wherein the communication device comprises one or
2 more devices selected from the group of a telephone system, a satellite system, an internet
3 system, and a radio system.

1 22. The apparatus of claim 21 wherein the remote controller comprises a computer
2 having an internet access and wherein the communication device comprises an internet
3 web site server.

1 23. The apparatus of claim 22 wherein the control system further comprises:
2 vi) a satellite system adapted to link signals between the internet web
3 site server and the surface control and data acquisition system.

1 24. An apparatus for downhole production or injection, comprising:
2 a) one or more completed electrically controlled wells;
3 b) one or more artificial lift systems incorporated in the one or more
4 completed wells; and
5 c) a control system comprising:

- 6 i) one or more surface control and data acquisition systems;
7 ii) one or more formation sensors disposed in communication with the
8 surface control and data acquisition systems;
9 iii) one or more devices of the artificial lift system disposed in
10 communication with the surface control and data acquisition systems; and
11 iv) one or more remote controllers disposed in communication with the
12 surface control and data acquisition system.

1 25. The apparatus of claim 24 wherein the one or more artificial lift systems comprises
2 one or more surface sensors and one or more sub-surface sensors.

1 26. The apparatus of claim 24 wherein the one or more artificial lift systems comprise
2 one or more programmable automation control systems.

1 27. The apparatus of claim 24, further comprising:

2 c) a retrievable pump system disposed in cooperation with the electrically
3 controlled well.

1 28. The apparatus of claim 27 wherein the retrievable pump system is deployed by a
2 component selected from the group consisting of coil tubing, electric wire line, hydraulic
3 pumping, and wire line.

1 29. The apparatus of claim 28 wherein the retrievable pump system is connected to one
2 or more control lines selected from the group consisting of fiber optic lines, fluid pumping
3 lines, and electric lines.

1 30. The apparatus of claim 27 wherein the retrievable pump system comprises one or
2 more pumps selected from the group consisting of an electric submersible pump, a linear
3 motor drive pump, an impeller driven pump, a progressive cavity pump, a gas lift, a rod
4 pump and a jet pump.

1 31. The apparatus of claim 30 wherein the retrievable pump system is disposed in

2 electrical connection with one or more wet connects disposed inside a production tubing of
3 the downhole production well.

1 32. The apparatus of claim 24, further comprising:

2 d) a communication device disposed between the one or more remote
3 controllers and the one or more surface control and data acquisition systems, wherein the
4 communication device comprises one or more devices selected from the group of a
5 telephone system, a satellite system, an internet system, and a radio system.

1 33. The apparatus of claim 32 wherein the remote controller comprises a computer
2 having an internet access and wherein the communication device comprises an internet
3 web site server.

1 34. The apparatus of claim 33 further comprising:

2 e) a satellite system adapted to link signals between the internet web site
3 server and the one or more surface control and data acquisition systems.

1 35. An apparatus for controlling and monitoring one or more production or injection
2 wells, comprising:

3 a) one or more surface control and data acquisition systems;
4 b) one or more sensors disposed in communication with the one or more
5 control and data acquisition systems;
6 c) one or more downhole devices disposed in communication with the one or
7 more control and data acquisition systems; and
8 d) one or more remote controllers disposed in communication with the one or
9 more surface control and data acquisition systems.

1 36. The apparatus of claim 35 further comprising:

2 e) a communication device disposed between the one or more remote
3 controllers and the one or more surface control and data acquisition systems.

1 37. The apparatus of claim 35 wherein the communication device comprises one or

more devices selected from the group of a telephone system, a satellite system, an internet system, and a radio system.

38. The apparatus of claim 37 wherein the remote controller comprises a computer having an internet access and wherein the communication device comprises an internet web site server.

39. The apparatus of claim 38 further comprising:

f) a satellite system adapted to link signals between the internet web site server and the one or more surface control and data acquisition systems.

40. The apparatus of claim 35 wherein the sensors comprise one or more permanent downhole sensors.

41. The apparatus of claim 35 wherein the sensors comprise one or more retrievable downhole sensors.

42. A method for monitoring and controlling a production or injection well or oilfield, comprising:

a) transmitting data collected by a downhole sensor module to a control and data acquisition system;

b) evaluating downhole operating conditions and optimizing downhole operating parameters utilizing an optimization software program disposed in communication with the control and data acquisition system; and

c) transmitting signals between the control and data acquisition system and a remote controller utilizing a communication system, the remote controller comprising a computer having an internet access.

43. The method of claim 42, further comprising:

d) storing data collected by the downhole sensor module in a memory storage in the control and data acquisition system.

1 44. The method of claim 42, further comprising:
2 d) collecting operational data utilizing one or more surface sensors connected
3 to the control and data acquisition system.

1 45. The method of claim 42 wherein the control and data acquisition system utilizes a
2 satellite link to transfer data via satellite to the remote controller.

1 46. The method of claim 42 wherein the remote controller sends commands to the
2 control and data acquisition system to modify operation of a downhole pump or to change
3 parameters inside the control and data acquisition system.

1 47. The method of claim 42 wherein the control and data acquisition system provides
2 on-site access to data and control of operation parameters.

1 48. The method of claim 42 wherein one or more control modules are disposed inside
2 the wellbore to control the flow of fluids in the wellbore to optimize downhole component
3 efficiency.

1 49. The method of claim 42 wherein the downhole sensors are connected to the control
2 and data acquisition system through a hydraulic line or an electric line deployed from the
3 surface into the wellbore.

1 50. The method of claim 42 wherein the remote controller is adapted to send a
2 command to the downhole sensor module via satellite communications.

1 51. The method of claim 42 wherein the downhole sensor module is connected to the
2 control and data acquisition system utilizing digital or analog communication techniques.

1 52. The method of claim 42 wherein the downhole sensor module is connected to the
2 control and data acquisition system utilizing one or more communication members
3 selected from the group of electrical cables, fiber optic cables, hydraulic devices,
4 electromagnetic devices, earth conduction devices, and acoustic devices.

1 53. The method of claim 42 wherein the control and data acquisition system is adapted
2 to control amount of chemicals delivered inside the wellbore.

1 54. The method of claim 42 wherein the control and data acquisition system is adapted
2 to monitor and control steam injection into the wellbore.

1 55. The method of claim 42 wherein the control and data acquisition system is adapted
2 to monitor and control formation influx.


1 56. The method of claim 42 wherein the control and data acquisition system is adapted
2 to monitor and control water influx.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183

ABSTRACT

The invention provides apparatus and methods for monitoring and controlling hydrocarbon production wells and/or injection wells from a remote location. The apparatus for monitoring and controlling one or more hydrocarbon production wells or injection wells from a remote location comprises one or more surface control and data acquisition systems; one or more sensors disposed in communication with the one or more control and data acquisition systems; one or more downhole flow control devices disposed in communication with the one or more control and data acquisition systems; and one or more remote controllers disposed in communication with the one or more control and data acquisition systems. Preferably, the remote controller comprises a computer having an internet access disposed in communication with the one or more control and data acquisition systems through a communication device comprising an internet web site server. The method for monitoring and controlling a downhole hydrocarbon production well or an injection well comprises: transmitting data collected by a downhole sensor module to a control and data acquisition system; evaluating downhole operating conditions and optimizing downhole operating parameters utilizing an optimization software program disposed in communication with the control and data acquisition system; and transmitting signals between the control and data acquisition system system and a remote controller utilizing a satellite communication system, the remote controller comprising a computer and an internet browser control access adapted to display operating conditions and parameters and to accept instructions to change operating parameters.

Fig. 1

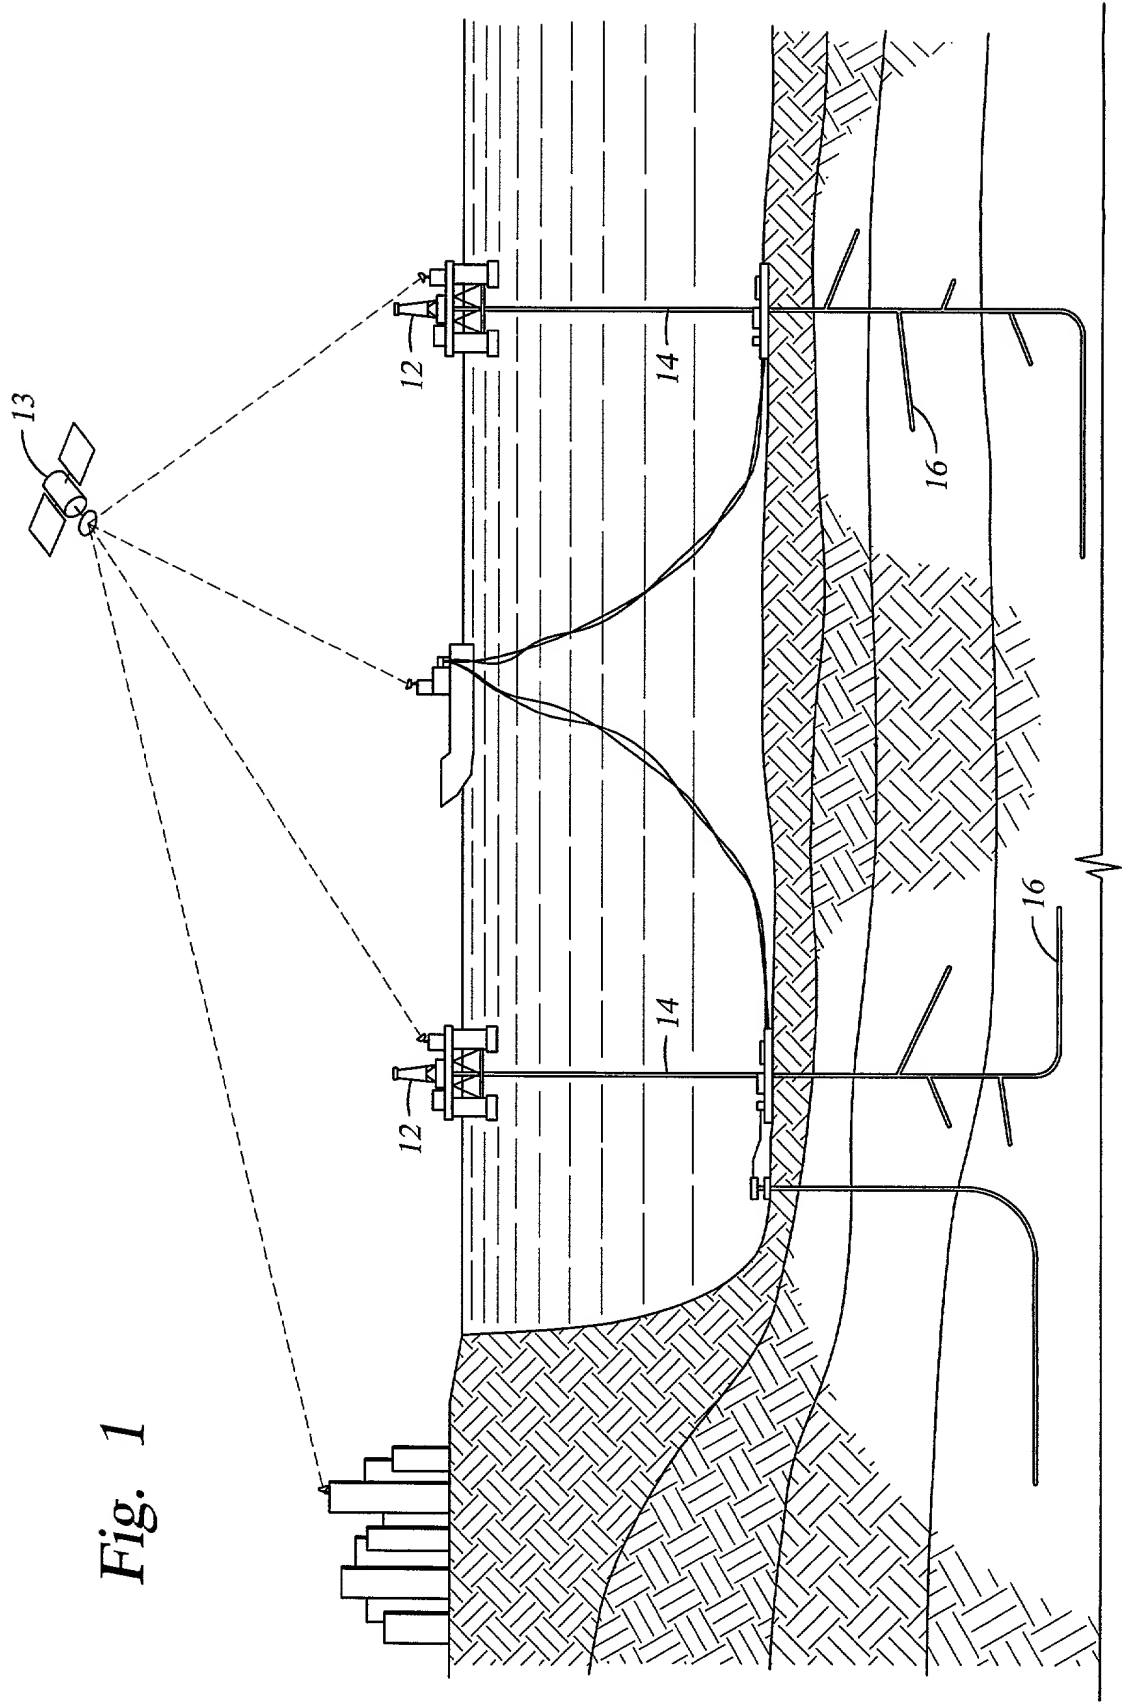

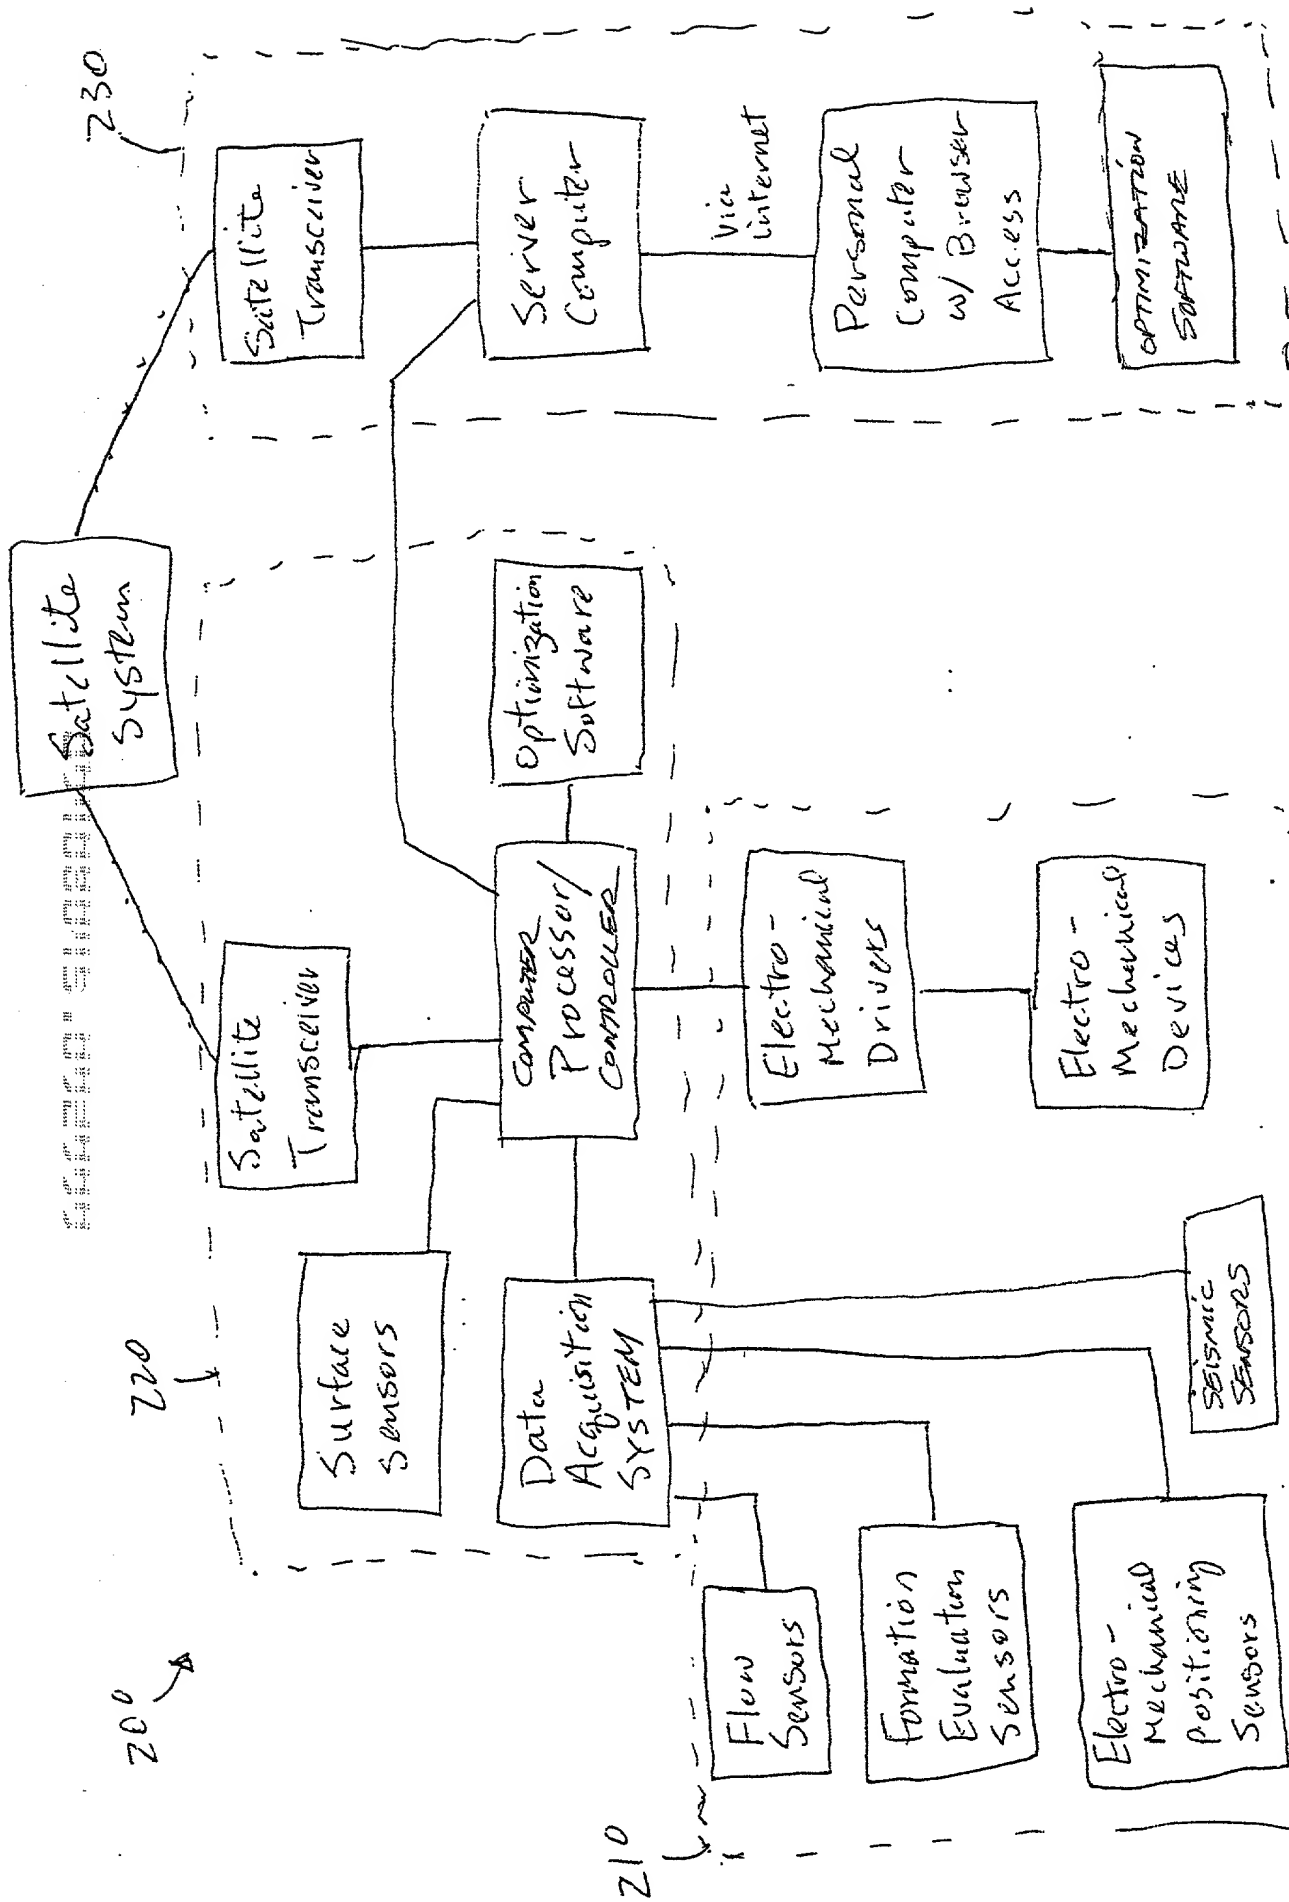


Figure 2

FIG. 3 is a block diagram of a system architecture. The system includes a central microprocessor (301) connected to various components. On the left, there are two sensor blocks: 'FORMATION EVALUATION SENSORS' (310) and 'ANALOG CONDITIONING HARDWARE' (309). The 'FORMATION EVALUATION SENSORS' (310) are connected to the 'ANALOG CONDITIONING HARDWARE' (309). The 'ANALOG CONDITIONING HARDWARE' (309) is connected to the 'ANALOG TO DIGITAL CONVERTER' (308). The 'ANALOG TO DIGITAL CONVERTER' (308) is connected to the 'MICROPROCESSORS' (301). Above the 'ANALOG TO DIGITAL CONVERTER' (308) are two sensor blocks: 'FLUID FLOW SENSORS' (311) and 'ELECTRO MECHANICAL POSITION SENSORS' (312). The 'FLUID FLOW SENSORS' (311) are connected to the 'ANALOG CONDITIONING HARDWARE' (309). The 'ELECTRO MECHANICAL POSITION SENSORS' (312) are connected to the 'ANALOG TO DIGITAL CONVERTER' (308). To the right of the 'MICROPROCESSORS' (301) are three blocks: 'NONVOLATILE MEMORY' (307), 'ELECTRO MECHANICAL DRIVERS' (309), and 'ELECTRO MECHANICAL DEVICES' (308). The 'MICROPROCESSORS' (301) are connected to the 'NONVOLATILE MEMORY' (307), the 'ELECTRO MECHANICAL DRIVERS' (309), and the 'ELECTRO MECHANICAL DEVICES' (308). Below the 'MICROPROCESSORS' (301) are three blocks: 'DIGITAL SIGNAL PROCESSOR' (304), 'COMMUNICATION DRIVERS/RECEIVERS' (305), and 'SERIAL BUS INTERFACE' (306). The 'MICROPROCESSORS' (301) are connected to the 'DIGITAL SIGNAL PROCESSOR' (304), the 'COMMUNICATION DRIVERS/RECEIVERS' (305), and the 'SERIAL BUS INTERFACE' (306).

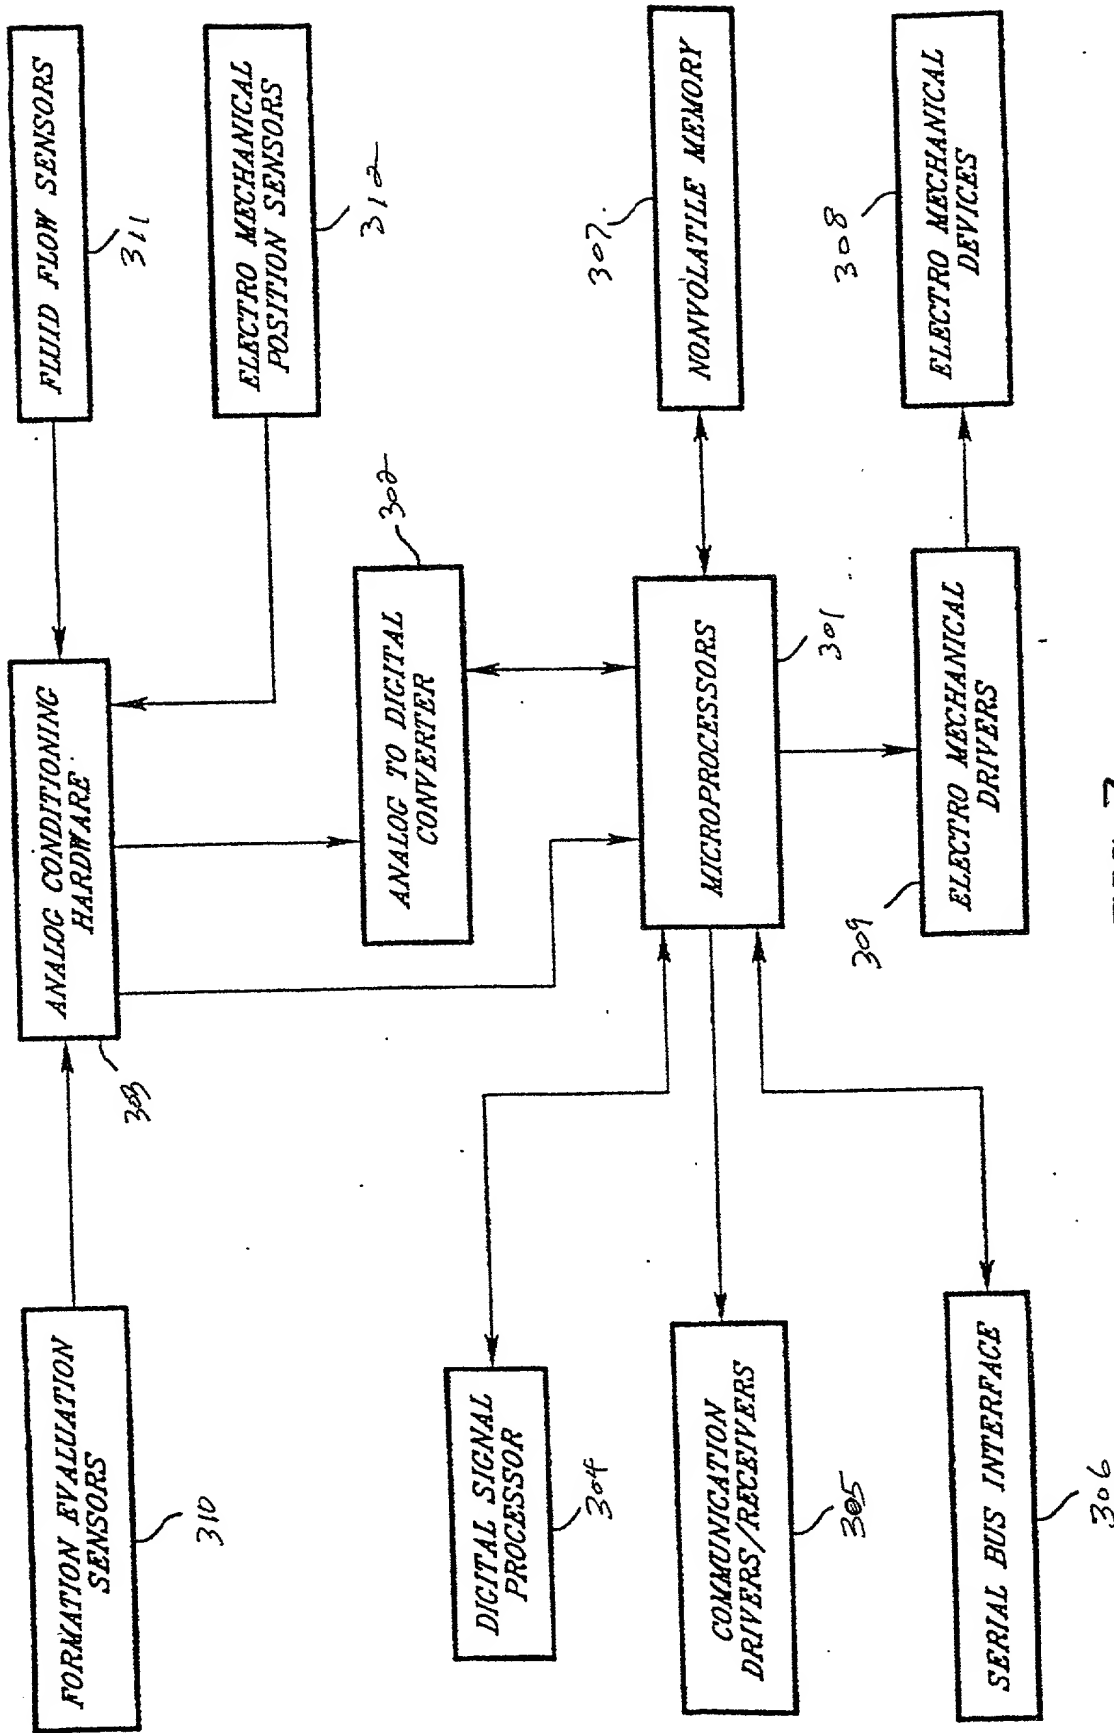


FIG. 3

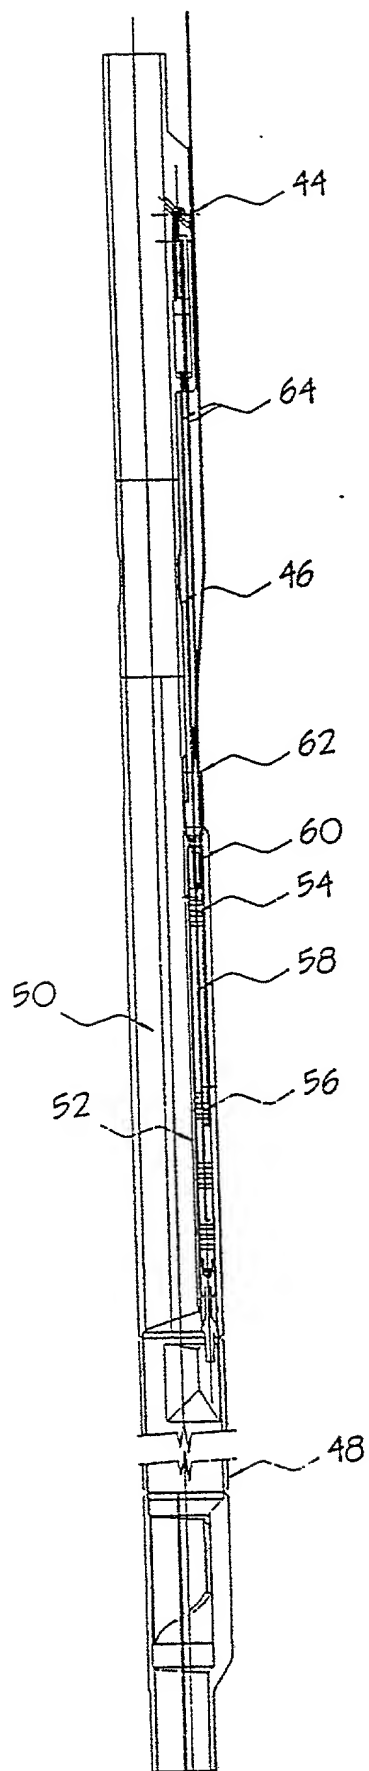


FIG. 4

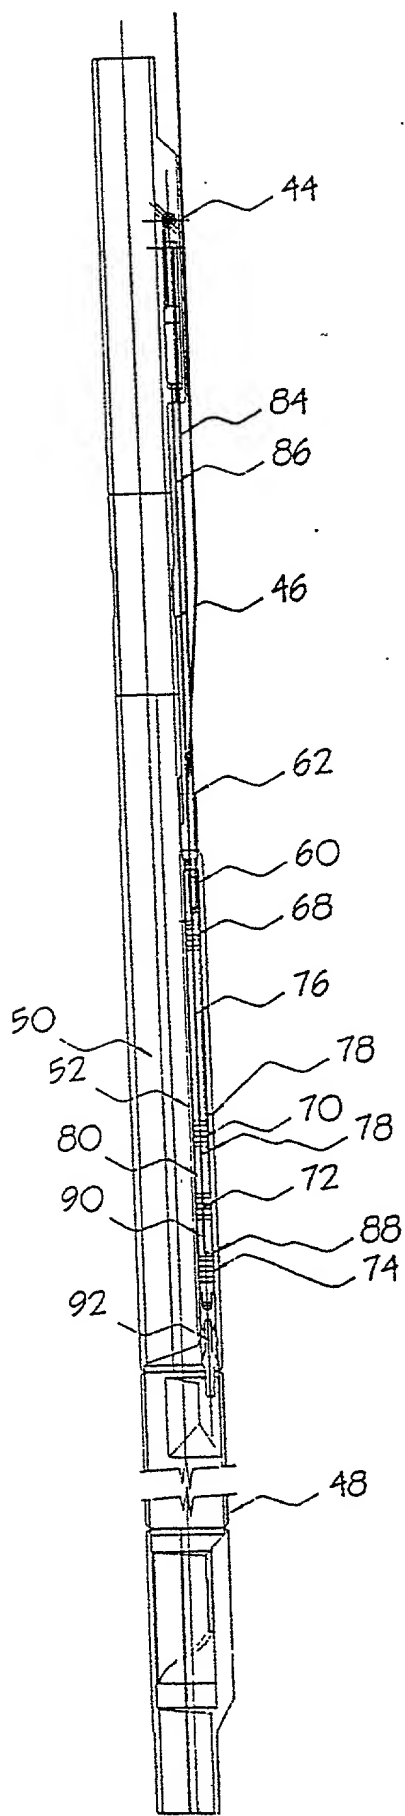


FIG. 5

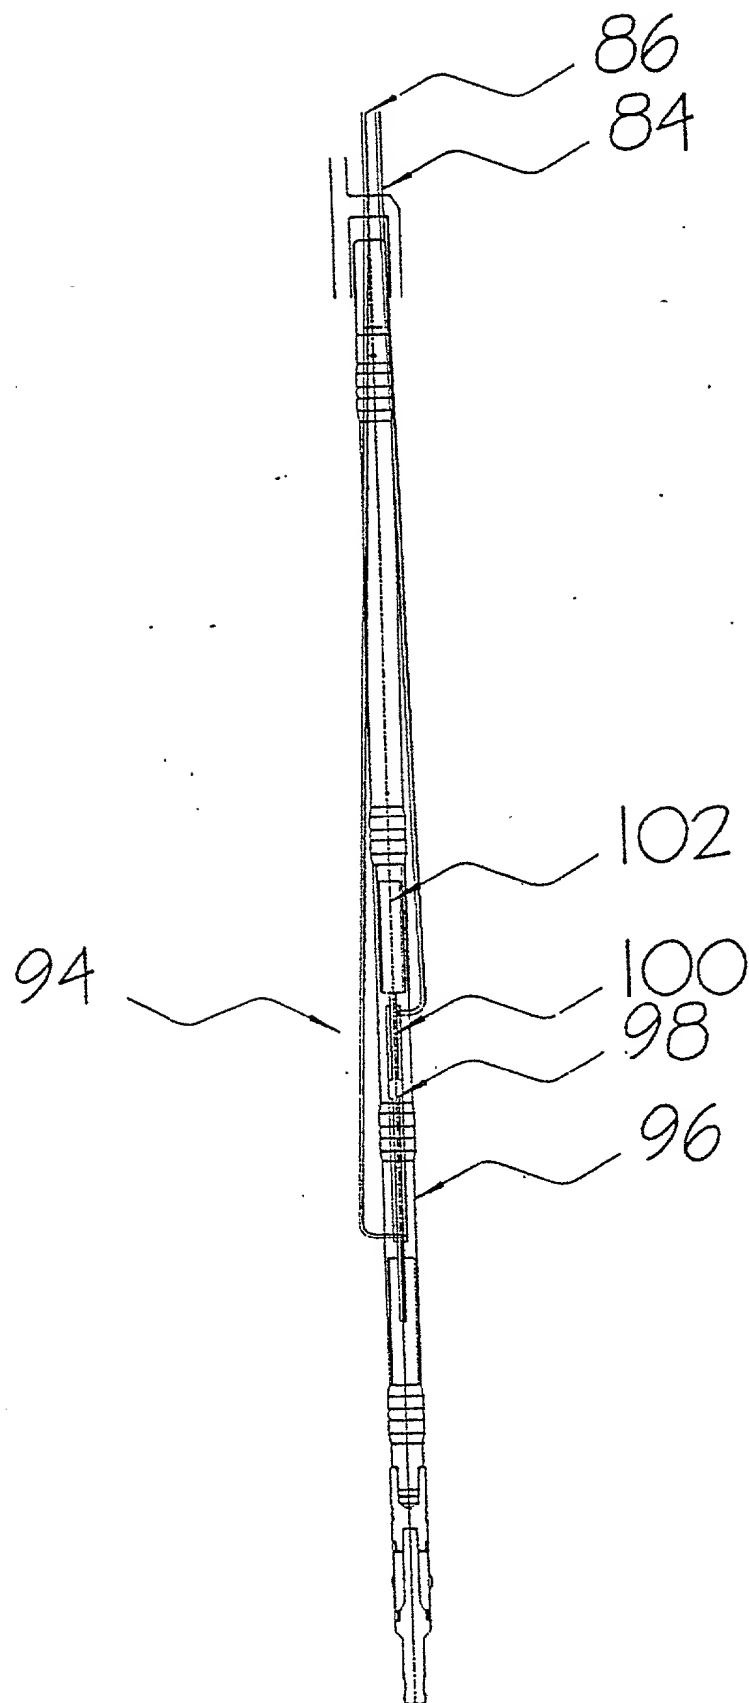


FIG. 6

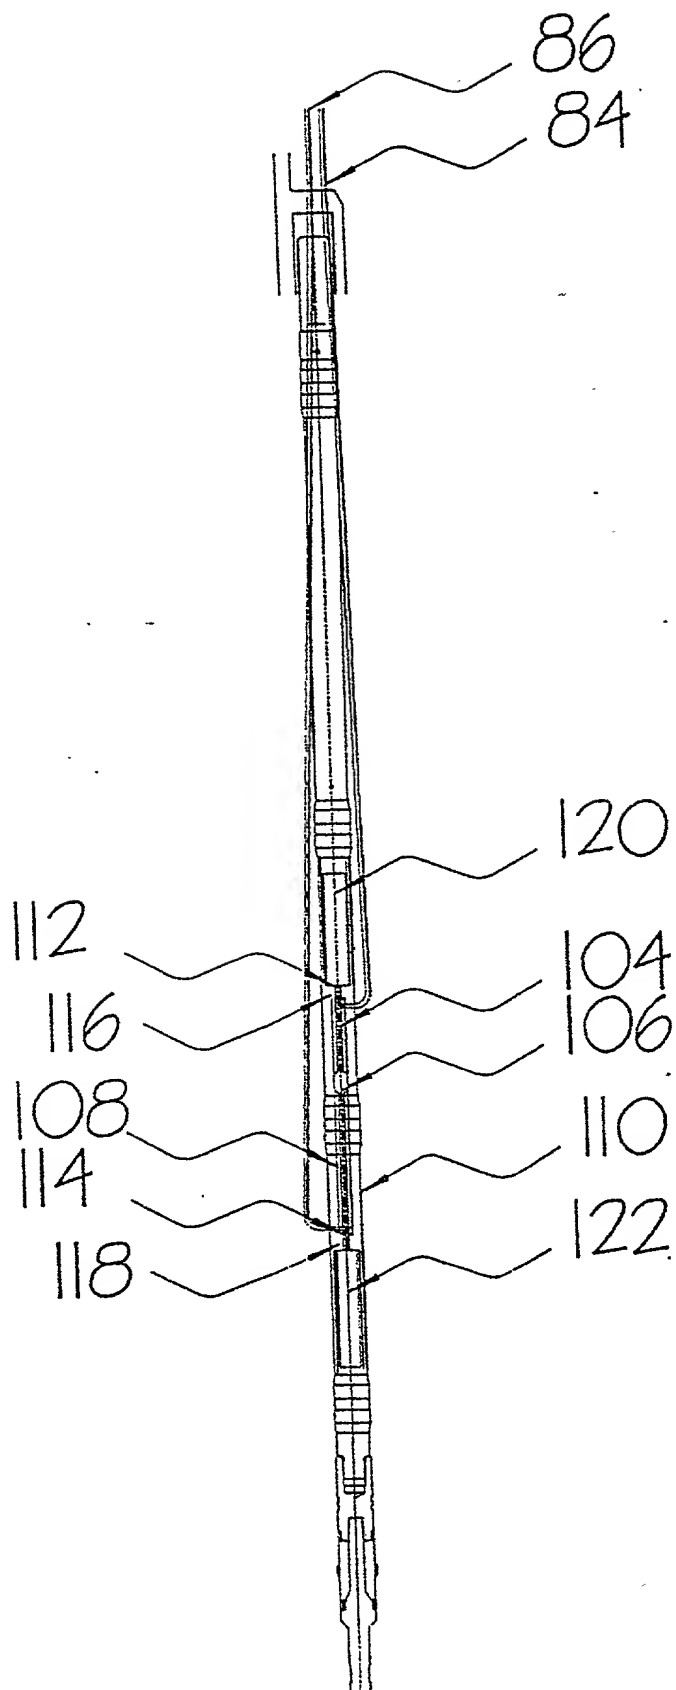


FIG. 7

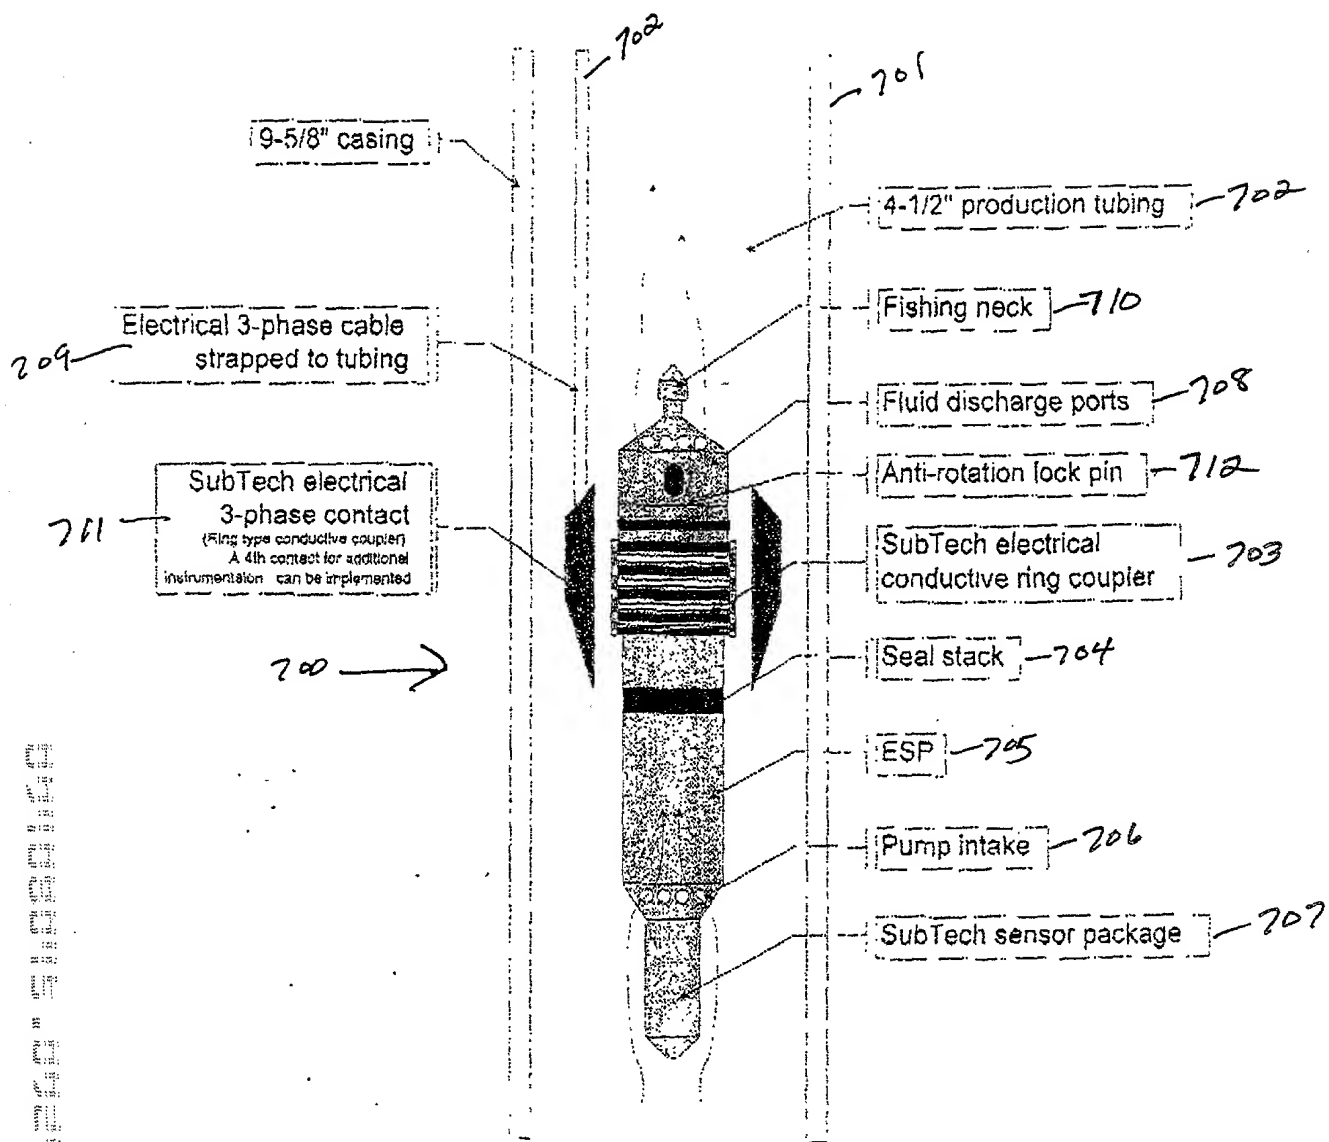


FIG. 8

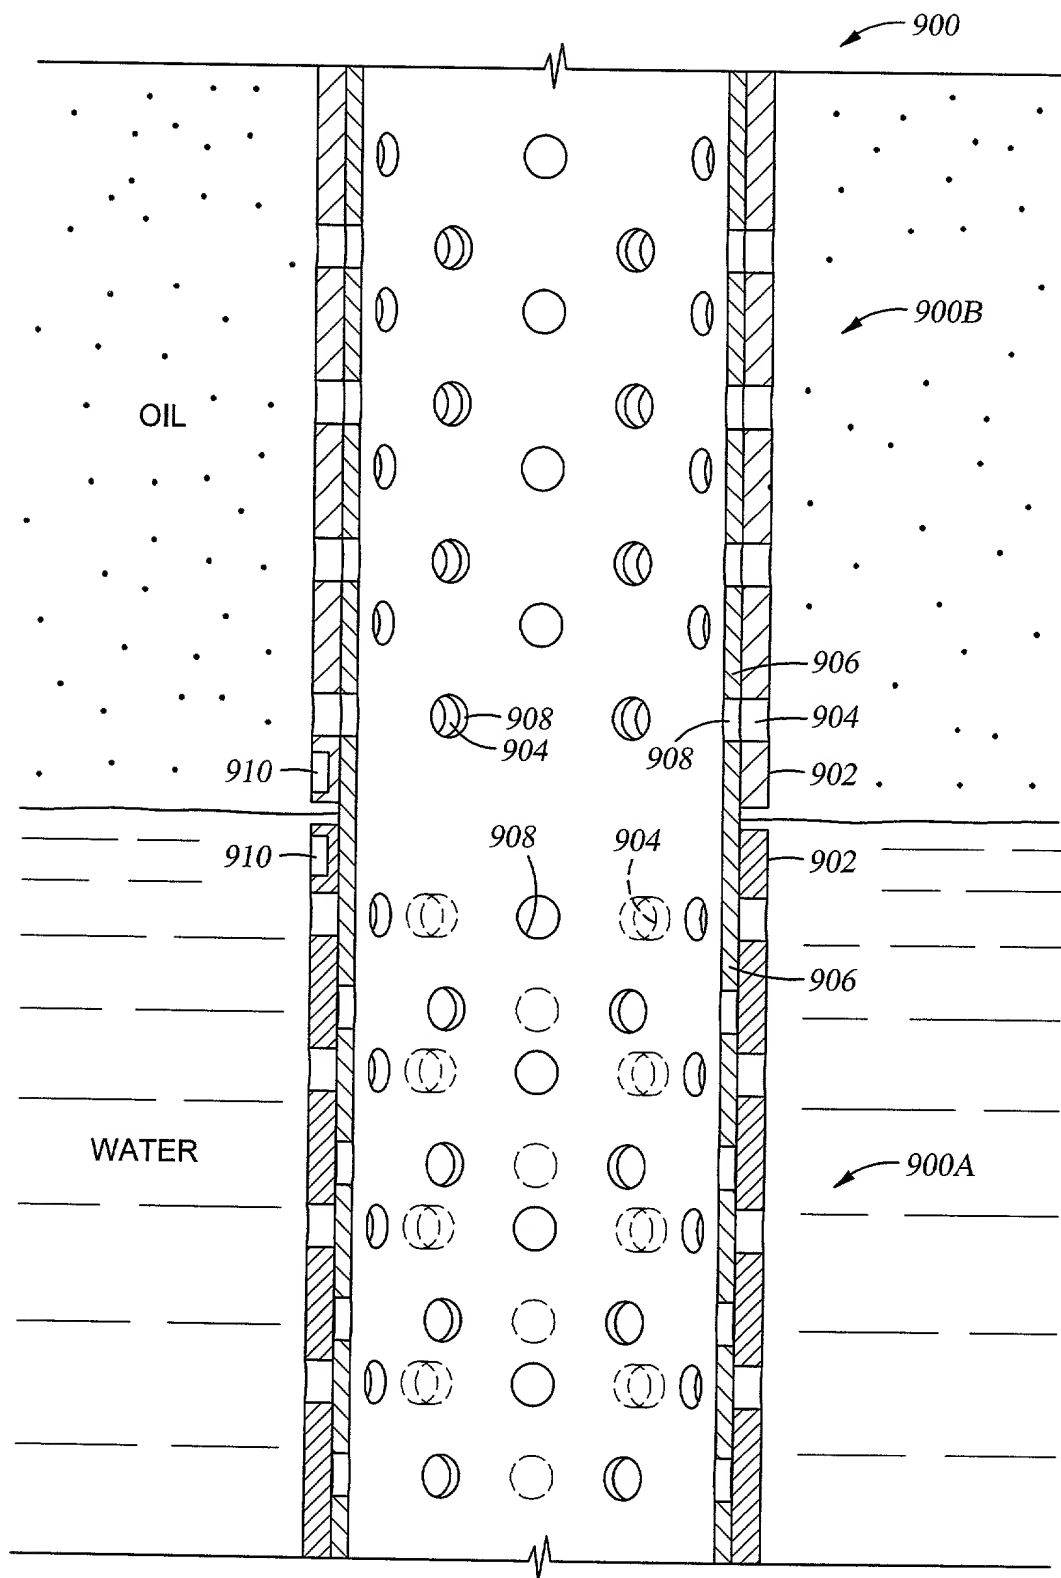


Fig. 9